

# BALLASTING INSTRUCTIONS

## BIKINI LOUNGER

### 1 Plan Ahead

The Bikini Lounger (A) can be filled with pool water to keep it in place on the sun ledge. Chlorinated pool water is recommended to help prevent algae growth inside the Lounger. Inspect the ballast water periodically for algae growth. Replace water if necessary.

### 2 Flip, Remove, Fill

To fill with water, remove the Threaded Plug (B) and Foam Seal (C). Submerge the Lounger upside down in the water and let the Lounger fill to the desired level. Keep the threaded opening in the highest position to allow the air to escape.


### 3 Turn, Secure & Enjoy

Once the desired level of water is reached, hand-tighten the threaded plug. The included 1" long screws are not necessary for water ballasting. They can be used if sand ballasting.

*Turning the Lounger upright may require two people.*

#### Note:

While ballasting the Lounger, avoid dragging the unit on rough surfaces, which may cause scratches.

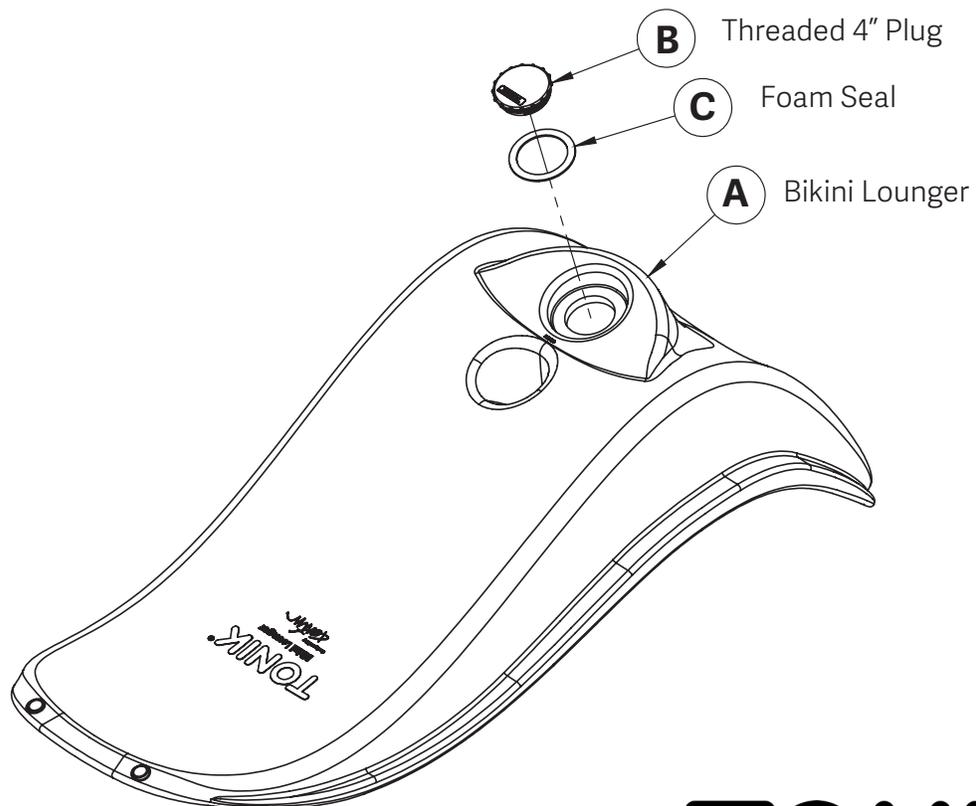

# TONIK®